

# Fire and Rescue Confined Space Kit

Order # EF7004-CS

RAMFAN's All-in-One Confined Space Kit is designed to ensure your team's safety and operational efficiency. This comprehensive kit features essential tools, including the robust UB20xx ventilation fan for powerful air circulation, the Atexor Light for reliable illumination in hazardous environments, the versatile Instagrid GO portable supply, and durable ECX Extension Cables for flexibility connectivity.

Equip your team with RAMFAN's Confined Space Kit and elevate your safety standards with tools designed for maximum operation success.



**UB20xx**

Compact and lightweight while delivering the highest CFM available. Ultra-quiet operation at 74 dB. Power cable is 7.6 m long for extended reach. Integrated duct adapters to easily connect to anti-static duct.



**Instagrid GO**

Portable battery power supply was designed specifically for professional applications, providing a power socket without constraints wherever it is required. Lightweight, robust, powerful, and flexible. The new standard for mobile work.




**ECX Extension Cables**

The ATEX/IECEX certified ECX series Power Cables from RAMFAN are designed to take a beating. Rated for Extra Hard Usage, the highly flexible H07RN-F cables are extremely high on impact, cutting, abrasion, oils, and most industrial chemicals.



**Atexor Light**

A versatile portable Ex-certified light, the SEMIC SP is extremely compact and durable, with an exceptionally long lifespan. Replaceable protective film makes it easy to keep the lights clean and bright.

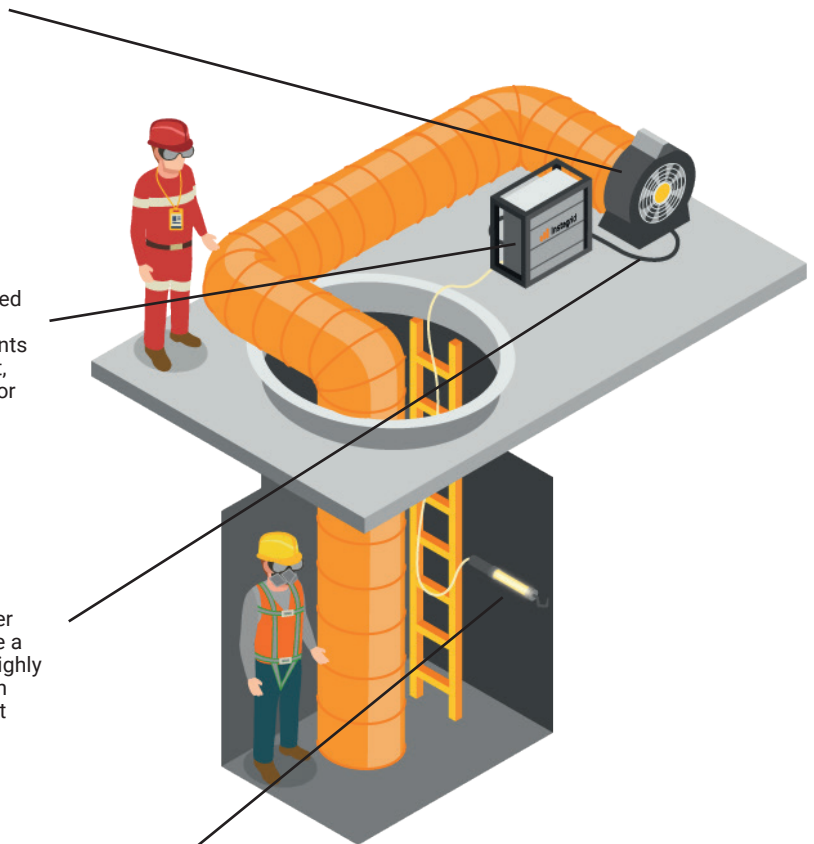

# Fire and Rescue Confined Space Kit

Order # EF7004-CS



Model	UB20xx (115V)	UB20xx(230V)
	included, anti-static duct & hardshell duct case	
Part #	EF7015	EF7015
Motor	0.33 Hp	0.25 kW
Electric	115V, 50/60Hz, 1ø	230V, 50/60Hz, 1ø
Amps	7A / 2A	7A / 1.2A



Model	SEMIC SP
Part #	AT-SSP110A2PEZ10
Temp. Rating	T4 (110V-230V) T5 (24-42V)
Oper. Temp.	-20°C to +40°C
Supply Voltage	24-48VAC and 110-230 VAC 24VDC avail. w/ special order



Model	Instagrid GO
Part #	IG-901-00006
Output Voltage	120VAC / 60Hz
Rated Output Power	3,600W (16A)
Pulse Output	18,000 W (80A)
Max. short-circuit cur.	500A
On (idle)	150h



Model	ECX
Part #	H7250151-ATX1
Type	H07RN-F
Oper. Temp. Range	20°C to +40°C
Color	Black
Length	50 ft.