

EX400 16"/40 cm

*Electric Variable Speed Blower with
PowerStream® Technology*

Convenience and performance packaged together. The dual current EX400 can be powered by the fire truck circuit when performing PPV at the entrance of the building. With the flip of the switch, the fan is ready to be plugged into the house circuit for continued fume free ventilation indoors.




Equipped with PowerStream® air straighteners that produce a powerful, straight, focused beam of air; allowing the fan to be set back further from a structure's entrance without sacrificing PPV performance.

Specifications

Model	EX400
Part	EB80600
Weight	68 lbs / 31 kg
Impeller	7-Blade
Dimensions (h/w/d)	22.6 x 17.4 x 18.5 in / 57 x 44 x 47 cm
Motor	1.5 Hp / 1.1 kW
Amps (Run)	15A or 20A
Noise	88 dB@3' (1m) / 84 dB@10' (3 m)
Electric	115V, 1Ø, 60Hz
Approvals	CE AMCA


Note: Output changes as setback from the opening changes. Single door airflow is per AMCA 240-6 testing. This data derives from 0° static pressure. Real world results will be substantially reduced by structure backpressure. The EX400 tested at 12 ft (3.6 m) setback at 20° tilt without stator vanes and 3,978 rpm.

AMCA 240, as defined and tested by the third-party Air Movement and Control Association (AMCA), is tested through a standard area opening which represents a single-door structure opening most often used in fire fighting PPV operations. This test procedure is published and is the most accurate method for PPV airflow testing that currently exists. AMCA's testing center is available to all manufacturers of ventilators for performance verification to this standard. Due to its standardized, published testing procedure and third-party status, this is known internationally as the best testing method for comparing PPV fans. Verify performance data online at AMCA.org.

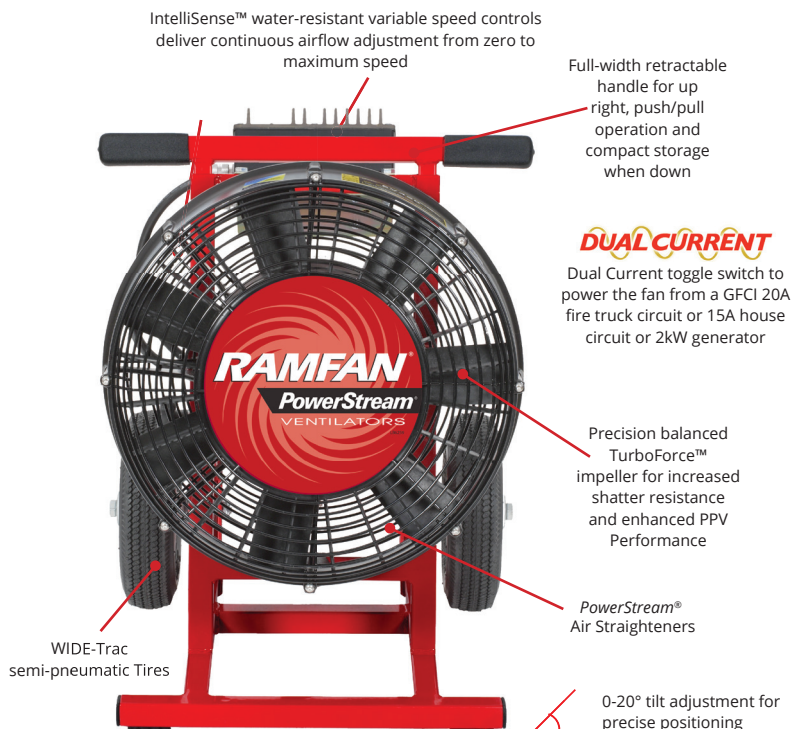

Performance

AMCA Verified Airflow	
Airflow	11,391 cfm 19,365 m³/hr

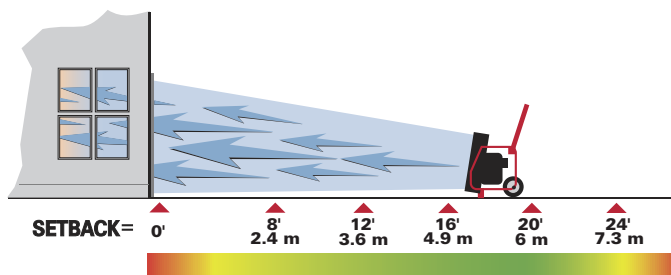

Available Accessories

Disposable Duct

Order # FDT-16DISP
16" (40 cm) diameter Disposable Layflat Polyethylene duct sold by the foot/meter



Layflat Duct

Order # FDT-1625SME
16" (40cm) Unreinforced layflat duct, 25' (7.6 m)

Order # FDT-L4X10SME
16" (40cm) 90° Unreinforced layflat duct, 4' (1.2m) x 10' (3m)



ECKO Flex™ with Carrying Bag

Order # FDT-1615BR
16" (40cm) standard duct 15' (4.6 m), w/ carrying bag

Order # FDT-1625BR
16" (40cm) standard duct 25' (7.6 m), w/ carrying bag



Non-collapsible, reinforced duct is constructed from flame retardant material and is crush resistant. Duct storage bag included with each duct purchase.