

INTERNATIONAL ELECTROTECHNICAL COMMISSION IEC Certification System for Explosive Atmospheres

for rules and details of the IECEx Scheme visit www.iecex.com

Certificate No.: IECEx UL 13.0062X Page 1 of 4

Status: Current Issue No: 5

Date of Issue: 2021-09-20

Applicant: Euramco Safety Inc.

2746 Via Orange Way Spring Valley, CA 91978 United States of America

Equipment: Blower Motors, Fans

Optional accessory:

Type of Protection: Flameproof Enclosures "db" and Increased Safety "eb"

Marking: Ex db eb IIB T6 Gb

-20 °C to + 40 °C

Approved for issue on behalf of the IECEx

Certification Body:

Katy A. Holdredge

Position: Senior Staff Engineer

Signature:

(for printed version)

Date:

- 1. This certificate and schedule may only be reproduced in full.
- 2. This certificate is not transferable and remains the property of the issuing body.
- 3. The Status and authenticity of this certificate may be verified by visiting www.iecex.com or use of this QR Code.



<u>Certificate history:</u> Issue 4 (2020-04-17)

Issue 3 (2019-11-19) Issue 2 (2015-12-28)

Issue 1 (2015-08-20) Issue 0 (2013-09-26)

Certificate issued by:

UL LLC 333 Pfingsten Road Northbrook IL 60062-2096 United States of America





Certificate No.: IECEx UL 13.0062X Page 2 of 4

Date of issue: 2021-09-20 Issue No: 5

Manufacturer: Euramco Saftey Inc.

2746 Via Orange Way Spring Valley, CA 91978 United States of America

Additional manufacturing locations:

This certificate is issued as verification that a sample(s), representative of production, was assessed and tested and found to comply with the IEC Standard list below and that the manufacturer's quality system, relating to the Ex products covered by this certificate, was assessed and found to comply with the IECEx Quality system requirements. This certificate is granted subject to the conditions as set out in IECEx Scheme Rules, IECEx 02 and Operational Documents as amended

STANDARDS:

The equipment and any acceptable variations to it specified in the schedule of this certificate and the identified documents, was found to comply with the following standards

IEC 60079-0:2017 Explosive atmospheres - Part 0: Equipment - General requirements

Edition:7.0

IEC 60079-1:2014-06 Explosive atmospheres - Part 1: Equipment protection by flameproof enclosures "d"

Edition:7.0

IEC 60079-7:2017 Explosive atmospheres - Part 7: Equipment protection by increased safety "e"

Edition:5.1

This Certificate **does not** indicate compliance with safety and performance requirements other than those expressly included in the Standards listed above.

TEST & ASSESSMENT REPORTS:

A sample(s) of the equipment listed has successfully met the examination and test requirements as recorded in:

Test Reports:

 US/UL/ExTR13.0063/00
 US/UL/ExTR13.0063/01
 US/UL/ExTR13.0063/02

 US/UL/ExTR13.0063/03
 US/UL/ExTR13.0063/04
 US/UL/ExTR13.0063/05

Quality Assessment Report:

US/UL/QAR12.0011/06



Certificate No.: IECEx UL 13.0062X Page 3 of 4

Date of issue: 2021-09-20 Issue No: 5

EQUIPMENT:

Equipment and systems covered by this Certificate are as follows:

The fans are intended to be used for ventilation purposes and are constructed of an IECEx certified Ex db IIB Motor, a plastic cover, an IECEx certified Ex db eb IIC junction box (including cable glands).

Models UB20xx, EFi75xx, EFi120xx and EFi150xx are similar in construction. All models consist of an IECEx certified Ex db IIB Motor, a plastic cover and an IECEx certified Ex db eb IIC junction box (including cable glands). The Model UB20xx uses separately approved increased safety cable glands rather than the ones that come with the outlet box.

Optional power plug/ connection extensions may be provided.

Please see Annex for additional information.

SPECIFIC CONDITIONS OF USE: YES as shown below:

This special condition of safe use refers to the fact that the Hazardous Location Fans referenced herein may be purchased with or without an AC power plug termination for the power cable.

If fans are purchased with unterminated power cables, (flying leads), then it becomes the responsibility, of the end user to select a compliant power plug in accordance with standard, IEC 60079-14 and to install the plug in accordance with the plug manufacturer's instructions. Color code for flying lead power cables is brown "hot", blue "neutral", & yellow/green "ground" for plug connections.

If fans are purchased with power plug termination for the power cable, manufacturer's instructions for plug & coupler/socket type matching & installations must be followed.



Certificate No.: IECEx UL 13.0062X Page 4 of 4

Date of issue: 2021-09-20 Issue No: 5

DETAILS OF CERTIFICATE CHANGES (for issues 1 and above)

Issue 1: Updated drawings and standards to current editions.

Issue 2: Revisions not affecting the safety of the product.

Issue 3: Updates standards to latest editions.

Issue 4: Addition of a power plug extension to the fans as an optional part to be supplied by the manufacturer. This revision also covers the evaluation of the power plugs which have IECEx certificates issued to older standard versions. There are no changes to the original construction of the fans.

Issue 5: Inclusion of alternate duct adapter in construction.

Annex:

Annex to IECEX UL 13.0062X Issue 5.pdf



Certificate No.: **IECEX UL 13.0062X**

Issue No.: 5

Page 1 of 3

TYPE DESIGNATION

Model Number Part Number Series

UB20xx EF7002

EF8002

EFi75xx EB7201XX

EB7201XX-230

EFi120xx **EA8120XX**

EA8120XX-110

EFi150xx EG8200XX

EG8200XX-230

PARAMETERS RELATING TO THE SAFETY

Model **Electrical Rating**

115 / 230 VAC, 2.3 / 1.2 A, 50 / 60 Hz UB20xx EFi75xx 115 / 230 VAC, 8.8 / 4.4 A, 50 / 60 Hz EFi120xx 110 / 240 VAC, 10.8 / 5.5 A, 50 Hz EFi150xx 115 / 230 VAC, 15 / 8.1 A, 50 / 60 Hz

MARKING

Marking has to be readable and indelible; it has to include the following indications:

Specification labels (EFi150xx, EFi120xx and EFi75xx):

Model: EFi150XX Volts: 115/230VAC, 50/60Hz Part #: EG8200XX Amps: 15A/8.1A

EG8200XX-230 **Power:** 1.73kW/1.86kW

Weight: 61lbs/28kg Free Air: 4459cfm/7580m³/hr MAX Air Inlet Temp: 40°C Motor: Rated 1.5HP

MAX Fan Casing Pressure:

12" w.g / 305 mm w.g.

Weight: 55lbs/25kg Motor: Rated 1.2HP

Model: EFi120XX

EA8120XX

Part #:

110 or 240VAC, 50Hz Volts: Amps: 10.8A 5.5A

1,19kW 1,32kW EA8120XX-110 Power: Free Air: 3750cfm/6375m³/hr MAX Air Inlet Temp: 40°C **MAX Fan Casing Pressure:**

12" w.g / 305 mm w.g.

115/230VAC, 50/60Hz Model: EFi75XX Volts: Part #: EB7201XX 8.8A/4.4A Amps:

EB7201XX-230 Power: 1.01kW

Weight: 44lbs/20kg Free Air: 2500cfm/4250m³/hr MAX Air Inlet Temp: 40°C Motor: Rated 0.75HP

MAX Fan Casing Pressure: 12" w.g / 305 mm w.g.




Certificate No.: IECEX UL 13.0062X

Issue No.: 5

Page 2 of 3

Certification labels (EFi150xx, EFi120xx and EFi75xx):

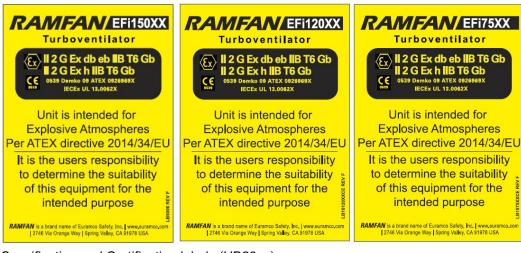

Specification and Certification labels (UB20xx):





Serial Number and Date Code reference:





Certificate No.: IECEX UL 13.0062X

Issue No.: 5

Page 3 of 3

LIST OF CERTIFIED COMPONENTS

The following additional previous editions of Standards noted under the "Standards" section of this Certificate were applied to integral Components as itemized below. There are no significant safety related changes between these previous editions and the editions noted under the "Standards" section.

Product	Certificate Number	Standards
Flameproof Electric Motor	IECEx UL 12.0034U Issue No. 3	IEC 60079-0:2011
Plug	IECEx LCI 04.0014 issue No. 2	IEC 60079-0 (Ed.3.1),
		IEC 60079-1 (Ed.4),
		IEC 60079-7 (Ed.3).
Plug	IECEx BVS 17.0045X Issue No. 2	IEC 60079-0 (Ed.6.0),
		IEC 60079-7 (Ed.5.0).
Plug	IECEx PTB 05.0023 Issue No. 3	IEC 60079-0 (Ed.4),
		IEC 60079-1 (Ed.6),
		IEC 60079-7 (Ed.4),