

PowerStream

-

FlowPath[™] Control

WORLD'S MOST POWERFUL BATTERY FANS



NEW CATEGORY OF BATTERY-POWERED PPV VENTILATORS

0.9hp **10,120 cfm** tested & certified on battery operation

Model	EX50Li 18" (46cm)
Order #EL5500-2PK	Includes RAMFAN EX50Li 115 VAC (1), 40V 6Ah battery packs (2) and carrying strap (1).
NSN (Nato Stock Number)	4140-01-667-0430
Motor	0.8 Hp / 0.6 kW
Runtime @ Max. Speed	DC: 90 minutes (four battery packs) DC: 45 minutes (two battery packs) DC: 23 minutes (one battery pack) AC: Unlimited
Battery System	40V Lithium-ion, 432Wh, 12Ah
IP Rating	IP66 / IP66 / IP66
Dimensions (h x w x d)	22" x 21" x 12" in / 56 x 53 x 30 cm
Weight	with two batteries: 54 lbs / 25 kg without batteries: 45 lbs / 20 kg
Approvals	<mark>б</mark> СЕ
AMCA Verified Airflow	
DC Power Supply	10,120 cfm (17,194 m³/hr)
AC Power Supply	9,635 cfm (16,370 m³/hr)




EX50Li

1.9hp 12,377 cfm tested & certified on battery operation

Model	EX150Li 18" (46 cm)
Order #EL6500 2PK	Includes RAMFAN EX150Li 52V 8Ah battery (2) , power cord (1), wheel kit assembled (1)
Motor	1.9hp / 1.4kw
Runtime @ Max. speed	DC:45 min DC Max: 30 min AC: Unlimited
Input AC	Multiple plug options available
Battery System	52V Lithium-Ion, 832Wh, 16Ah
IP Rating	IP66 / IP66 / IP66
Dimensions (h x w x d)	23 x 21 x 19 in / 58 x 53 x48 cm
Weight	with two batteries: 71 lbs / 32 kg without batteries: 58 lbs / 26 kg
Approvals	ĨĨ C€
AMCA Verified Airflow	
DC Power Supply	12,377 cfm (21,029 m³/hr)
AC Power Supply	11,896 cfm (20,211 m³/hr)



- Integrated Charger
- Swappable Lithium-Ion Packs
- Multi-Mission Functionality

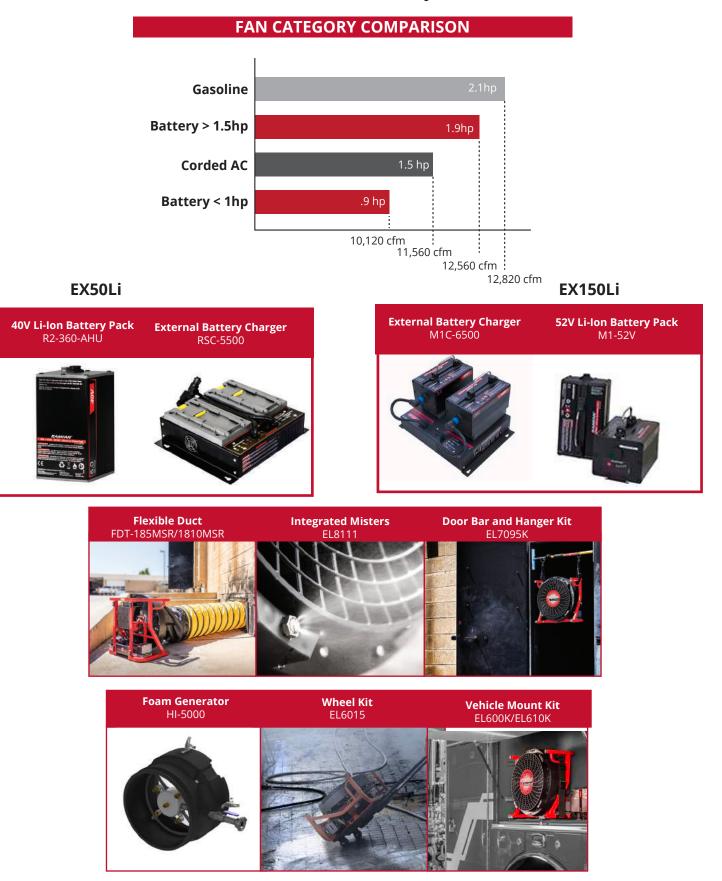





041320

PROUDLY MADE IN CALIFORNIA